




Pipe & Ventilation Clamps









ABOUT US

Since our establishment in June 2023, Argas Group has been dedicated to delivering unparalleled service to our valued clients. With a wealth of international experience, we are proud to offer top-quality products at the most competitive prices in the market. Through a comprehensive analysis of the HVAC sector, we have identified gaps and have taken the initiative to provide an extensive product range that includes rubber insulation, duct flanges, air curtains, flexible ducts, insulation tapes, and more. Our commitment extends beyond product supply as we strive to provide our clients with expert advice tailored to their specific needs. At Argas Group, we are driven by our mission to ensure customer satisfaction through exceptional service and the highest quality offerings.



INDEX

Pipe Clamps
Ventilation Clamps

Pipe Clamp with nut					
With Rubber  SK	Without Rubber  SKL	With Rubber (Set)  SKS	Without Rubber (Set)  SKSL		
Pipe Clamp with Combi Nut					
With Rubber  KS	Without Rubber  KSL	With Rubber (Set)  KSS	Without Rubber (Set)  KSLS		
Pipe Clamps With Triphone					
With Rubber  TF	Without Rubber  TFL	With Rubber  TU	Without Rubber  TUL	Without Rubber (Set)  TFS	Without Rubber (Set)  TFLS
Heavy Duty Pipe Clamp with Head					
With Rubber  AK	Without Rubber  AKL	With Rubber  AS	Without Rubber  ASL	With Rubber (Set)  ACS	Without Rubber (Set)  ACSL
Sprinkler Pipe Clamps				Pvc Pipe Clamps	
Standard  SPR	Long  SPRU	With Rivet Nut  SPRS	 PBK		
Ventilation Pipe Clamps					
With Rubber  HS	Without Rubber  HSL	With Combi Nut  HKS	Combi Nut Without Rubber  HKSL	With Rubber  HC	Without Rubber  HSL
Sliding Hinge			U Bolt Pipe Clamp		Insulation Support
 KM	 KOL		 UB	 PIT	
Profiles & Channels					
 CL 2718	 CL 2830	 C 2141	 C 4141	 CL 27	 CL 28
				 C 21	 C 41
Accessories					
 UT4 - UT5	 UT6 - UT7	 UT8	 CLE	 CLB	 NTP-NTN

Pipe Clamps


Pipe Clamp With Nut




Application / Uygulama:

Used with pvc, pe, pp, cast iron, steel and copper pipes.


Mounting Example

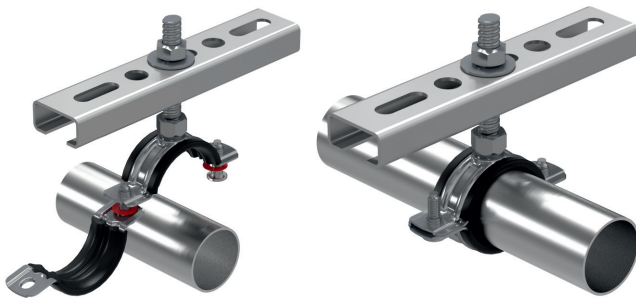

SK

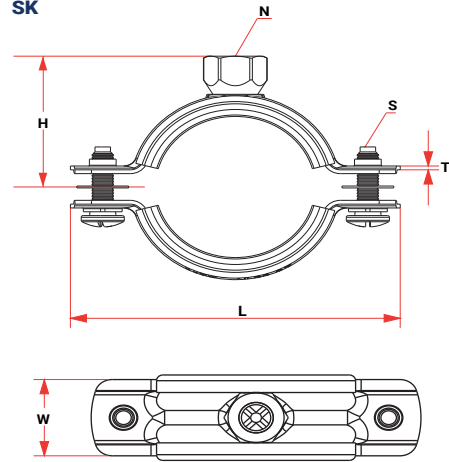

Clamping range with rubber



Clamping range without rubber

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50 $^{\circ}$ C / +110 $^{\circ}$ C

SK

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	NUT (N) (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT PER BOX AVERAGE KG
SK 006	1/8"	9 - 12	52,1	22,5	1x20	M5	M8	3,9	1,3	300	10,80
SK 008	1/4"	13 - 20	54,5	24	1x20	M5	M8	3,9	1,3	250	9,50
SK 010	3/8"	17 - 23	58,5	26	1x20	M5	M8	3,9	1,3	250	10,25
SK 015	1/2"	20 - 25	62,5	28	1x20	M5	M8	3,9	1,3	200	8,60
SK 020	3/4"	25 - 30	68,5	31	1x20	M5	M8	3,9	1,3	150	7,05
SK 025	1"	32 - 37	76	34,5	1x20	M5	M8	3,9	1,3	150	7,95
SK 032	1 1/4"	40 - 46	91,5	39	1,2x20	M5	M8	4,8	1,6	100	6,80
SK 040	1 1/2"	48 - 53	99	42,5	1,2x20	M5	M8	4,8	1,6	75	5,63
SK 047	53-59	53 - 59	105	45,5	1,2x20	M5	M8	4,8	1,6	75	6,00
SK 050	2"	60 - 66	112	49	1,2x20	M5	M8	4,8	1,6	50	4,35
SK 060	67-77	67 - 77	126	56	1,5x25	M6	M10	6,9	2,3	40	6,08
SK 065	2 1/2"	75 - 84	134	60	1,5x25	M6	M10	6,9	2,3	40	6,36
SK 075	83-93	83 - 93	142	64	1,5x25	M6	M10	6,9	2,3	40	6,80
SK 080	3"	87 - 96	145	65,5	1,5x25	M6	M10	6,9	2,3	40	6,96
SK 085	94-104	94 - 104	153	69,5	1,5x25	M6	M10	6,9	2,3	30	5,79
SK 095	102-111	102 - 111	161	73,5	1,5x25	M6	M10	6,9	2,3	40	7,76
SK 100	4"	109 - 119	170	78	1,5x25	M6	M10	6,9	2,3	30	6,15
SK 110	122-135	122 - 135	184	84,5	2x25	M6	M10	7,8	2,6	30	8,07
SK 120	128-139	128 - 139	190	87,5	2x25	M6	M10	7,8	2,6	30	8,43
SK 125	5"	135 - 148	197	91	2x25	M6	M10	7,8	2,6	25	7,38
SK 140	151-164	151 - 164	213	99	2x25	M6	M10	7,8	2,6	25	8,00
SK 150	6"	158 - 170	222	103,5	2x25	M6	M10	7,8	2,6	20	6,82
SK 180	194-205	194 - 205	257	121	2x25	M6	M12	7,8	2,6	15	5,93
SK 200	8"	214 - 224	272	130	2x25	M6	M12	7,8	2,6	15	6,29

Pipe Clamp With Nut (Set)




SKS clamp includes hanger bolt and plastic dowel


Application / Uygulama:

Used with pvc, pe, pp, cast iron, steel and copper pipes.


Package View & Mounting Example

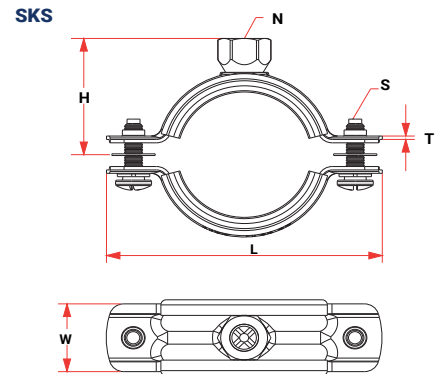

Clamping range with rubber








Clamping range without rubber

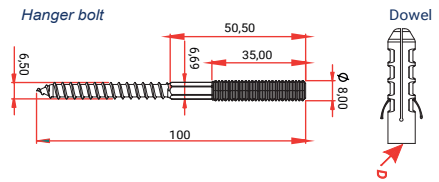

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50 $^{\circ}$ C / +110 $^{\circ}$ C


SKS

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	NUT (N) (mm)	HANGER BOLT (A) (metric)	DOWEL (D) (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT PER BOX AVERAGE KG
SKS 006	1/8"	9 - 12	52,1	22,5	1x20	M5	M8	M8x80	10	3,9	1,3	150	8,81
SKS 008	1/4"	13 - 20	54,5	24	1x20	M5	M8	M8x80	10	3,9	1,3	120	7,28
SKS 010	3/8"	17 - 23	58,5	26	1x20	M5	M8	M8x80	10	3,9	1,3	100	6,43
SKS 015	1/2"	20 - 25	62,5	28	1x20	M5	M8	M8x80	10	3,9	1,3	100	6,64
SKS 020	3/4"	25 - 30	68,5	31	1x20	M5	M8	M8x80	10	3,9	1,3	100	7,06
SKS 025	1"	32 - 37	76	34,5	1x20	M5	M8	M8x80	10	3,9	1,3	80	6,13
SKS 032	1 1/4"	40 - 46	91,5	39	1,2x20	M5	M8	M8x80	10	4,8	1,6	60	5,54
SKS 040	1 1/2"	48 - 53	99	42,5	1,2x20	M5	M8	M8x80	10	4,8	1,6	50	5,00
SKS 047	53-59	53 - 59	105	45,5	1,2x20	M5	M8	M8x80	10	4,8	1,6	50	5,25
SKS 050	2"	60 - 66	112	49	1,2x20	M5	M8	M8x80	10	4,8	1,6	50	5,52
SKS 060	67-77	67 - 77	126	56	1,5x25	M6	M10	M10x100	12	6,9	2,3	40	7,75
SKS 065	2 1/2"	75 - 84	134	60	1,5x25	M6	M10	M10x100	12	6,9	2,3	40	8,05
SKS 075	83-93	83 - 93	142	64	1,5x25	M6	M10	M10x100	12	6,9	2,3	40	8,46
SKS 080	3"	87 - 96	145	65,5	1,5x25	M6	M10	M10x100	12	6,9	2,3	40	8,65
SKS 085	94-104	94 - 104	153	69,5	1,5x25	M6	M10	M10x100	12	6,9	2,3	30	7,04
SKS 095	102-111	102 - 111	161	73,5	1,5x25	M6	M10	M10x100	12	6,9	2,3	30	7,13
SKS 100	4"	109 - 119	170	78	1,5x25	M6	M10	M10x100	12	6,9	2,3	30	7,39
SKS 110	122-135	122 - 135	184	84,5	2x25	M6	M10	M10x100	12	7,8	2,6	30	9,30
SKS 120	128-139	128 - 139	190	87,5	2x25	M6	M10	M10x100	12	7,8	2,6	25	8,00
SKS 125	5"	135 - 148	197	91	2x25	M6	M10	M10x100	12	7,8	2,6	20	6,73
SKS 140	151-164	151 - 164	213	99	2x25	M6	M10	M10x100	12	7,8	2,6	20	7,28
SKS 150	6"	158 - 170	222	103,5	2x25	M6	M10	M10x100	12	7,8	2,6	20	7,63
SKS 180	194-205	194 - 205	257	121	2x25	M6	M12	M12x100	14	7,8	2,6	10	4,66
SKS 200	8"	214 - 224	272	130	2x25	M6	M12	M12x100	14	7,8	2,6	10	4,90

Pipe Clamp with nut					
With Rubber  SK	Without Rubber  SKL	With Rubber (Set)  SKS	Without Rubber (Set)  SKSL		
Pipe Clamp with Combi Nut					
With Rubber  KS	Without Rubber  KSL	With Rubber (Set)  KSS	Without Rubber (Set)  KSLS		
Pipe Clamps With Triphone					
With Rubber  TF	Without Rubber  TFL	With Rubber  TU	Without Rubber  TUL	Without Rubber (Set)  TFS	Without Rubber (Set)  TFLS
Heavy Duty Pipe Clamp with Head					
With Rubber  AK	Without Rubber  AKL	With Rubber  AS	Without Rubber  ASL	With Rubber (Set)  ACS	Without Rubber (Set)  ACSL
Sprinkler Pipe Clamps				Pvc Pipe Clamps	
Standard  SPR	Long  SPRU	With Rivet Nut  SPRS	 PBK		
Ventilation Pipe Clamps					
With Rubber  HS	Without Rubber  HSL	With Combi Nut  HKS	Combi Nut Without Rubber  HKSL	With Rubber  HC	Without Rubber  HSL
Sliding Hinge			U Bolt Pipe Clamp		Insulation Support
 KM	 KOL		 UB	 PIT	
Profiles & Channels					
 CL 2718	 CL 2830	 C 2141	 C 4141	 CL 27	 CL 28
				 C 21	 C 41
Accessories					
 UT4 - UT5	 UT6 - UT7	 UT8	 CLE	 CLB	 NTP-NTN

Pipe Clamps


Pipe Clamp With Combi Nut




Application / Uygulama

Used with pvc, pe, pp, cast iron, steel and copper pipes.

Mounting Example

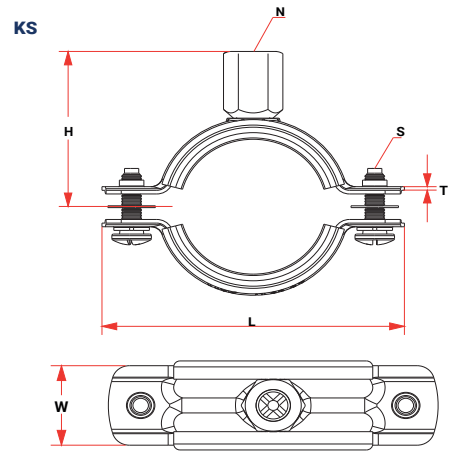

Clamping range with rubber



Clamping range without rubber

Material:

Steel

Standard Finish:

Zinc Plated

Hardness of Rubber Lining:

55 $\pm$ 5 Shore A

Isolation Rubber:

Standard TPE, on request EPDM


Temperature Resistance:

-50°C / +110°C

KS

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	NUT (N) (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT PER BOX AVERAGE KG
KS 006	1/8"	9 - 12	52,1	30,5	1x20	M5	M8 / M10	3,9	1,3	250	10,75
KS 008	1/4"	13 - 20	54,5	32	1x20	M5	M8 / M10	3,9	1,3	250	11,25
KS 010	3/8"	17 - 23	58,5	34	1x20	M5	M8 / M10	3,9	1,3	250	12,00
KS 015	1/2"	20 - 25	62,5	36	1x20	M5	M8 / M10	3,9	1,3	200	10,00
KS 020	3/4"	25 - 30	68,5	39	1x20	M5	M8 / M10	3,9	1,3	150	8,10
KS 025	1"	32 - 37	76	42,5	1x20	M5	M8 / M10	3,9	1,3	150	9,00
KS 032	1 1/4"	40 - 46	91,5	47	1,2x20	M5	M8 / M10	4,8	1,6	100	7,50
KS 040	1 1/2"	48 - 53	99	50,5	1,2x20	M5	M8 / M10	4,8	1,6	75	6,15
KS 047	53-59	53 - 59	105	53,5	1,2x20	M5	M8 / M10	4,8	1,6	75	6,53
KS 050	2"	60 - 66	112	57	1,2x20	M5	M8 / M10	4,8	1,6	50	4,70
KS 060	67-77	67 - 77	126	62	1,5x25	M6	M8 / M10	6,9	2,3	40	6,04
KS 065	2 1/2"	75 - 84	134	66	1,5x25	M6	M8 / M10	6,9	2,3	40	6,36
KS 075	83-93	83 - 93	142	70	1,5x25	M6	M8 / M10	6,9	2,3	40	6,76
KS 080	3"	87 - 96	145	71,5	1,5x25	M6	M8 / M10	6,9	2,3	40	6,96
KS 085	94-104	94 - 104	153	75,5	1,5x25	M6	M8 / M10	6,9	2,3	30	5,76
KS 095	102-111	102 - 111	161	79,5	1,5x25	M6	M8 / M10	6,9	2,3	40	7,72
KS 100	4"	109 - 119	170	84	1,5x25	M6	M8 / M10	6,9	2,3	30	6,12
KS 110	122-135	122 - 135	184	90,5	2x25	M6	M8 / M10	7,8	2,6	30	8,04
KS 120	128-139	128 - 139	190	93,5	2x25	M6	M8 / M10	7,8	2,6	30	8,40
KS 125	5"	135 - 148	197	97	2x25	M6	M8 / M10	7,8	2,6	25	7,38
KS 140	151-164	151 - 164	213	105	2x25	M6	M8 / M10	7,8	2,6	25	8,00
KS 150	6"	158 - 170	222	109,5	2x25	M6	M8 / M10	7,8	2,6	20	6,80
KS 180	194-205	194 - 205	257	127	2x25	M6	M8 / M10	7,8	2,6	15	5,87
KS 200	8"	214 - 224	272	136	2x25	M6	M8 / M10	7,8	2,6	15	6,23

Pipe Clamp With Combi Nut (Set)



Combi Nut
(Section)




KSS clamp includes hanger bolt and plastic dowel



Application / Uygulama

Used with pvc, pe, pp, cast iron, steel and copper pipes.


Package View & Mounting Example

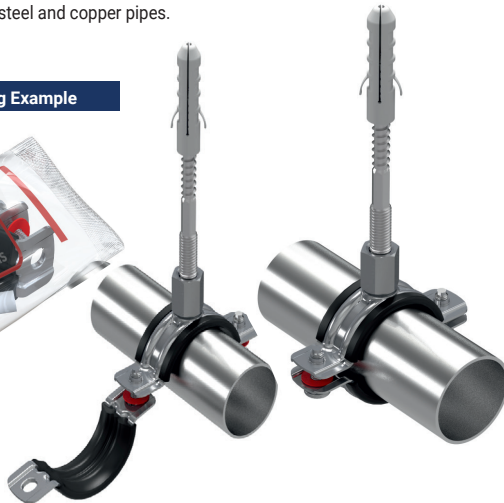

KSS




Clamping range with rubber



Clamping range without rubber

Hanger bolt



Dowel



Material:

Steel

Standard Finish:

Zinc Plated

Hardness of Rubber Lining:

55 $\pm$ 5 Shore A

Isolation Rubber:

Standard TPE, on request EPDM

Temperature Resistance:

-50°C / +110°C

KSS

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	NUT (N) (mm)	HANGER BOLT (A) (metric)	DOWEL (D) (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT PER BOX AVERAGE KG
KSS 006	1/8"	9 - 12	52,1	30,5	1x20	M5	M8 / M10	M8x80	10	3,9	1,3	150	9,45
KSS 008	1/4"	13 - 20	54,5	32	1x20	M5	M8 / M10	M8x80	10	3,9	1,3	120	7,80
KSS 010	3/8"	17 - 23	58,5	34	1x20	M5	M8 / M10	M8x80	10	3,9	1,3	100	6,90
KSS 015	1/2"	20 - 25	62,5	36	1x20	M5	M8 / M10	M8x80	10	3,9	1,3	100	7,10
KSS 020	3/4"	25 - 30	68,5	39	1x20	M5	M8 / M10	M8x80	10	3,9	1,3	100	7,50
KSS 025	1"	32 - 37	76	42,5	1x20	M5	M8 / M10	M8x80	10	3,9	1,3	75	6,08
KSS 032	1 1/4"	40 - 46	91,5	47	1,2x20	M5	M8 / M10	M8x80	10	4,8	1,6	50	4,80
KSS 040	1 1/2"	48 - 53	99	50,5	1,2x20	M5	M8 / M10	M8x80	10	4,8	1,6	50	5,10
KSS 047	53-59	53 - 59	105	53,5	1,2x20	M5	M8 / M10	M8x80	10	4,8	1,6	50	5,35
KSS 050	2"	60 - 66	112	57	1,2x20	M5	M8 / M10	M8x80	10	4,8	1,6	40	4,52
KSS 060	67-77	67 - 77	126	62	1,5x25	M6	M8 / M10	M8x80	10	6,9	2,3	40	6,80
KSS 065	2 1/2"	75 - 84	134	66	1,5x25	M6	M8 / M10	M8x80	10	6,9	2,3	40	7,12
KSS 075	83-93	83 - 93	142	70	1,5x25	M6	M8 / M10	M8x80	10	6,9	2,3	40	7,56
KSS 080	3"	87 - 96	145	71,5	1,5x25	M6	M8 / M10	M8x80	10	6,9	2,3	40	7,72
KSS 085	94-104	94 - 104	153	75,5	1,5x25	M6	M8 / M10	M8x80	10	6,9	2,3	30	6,36
KSS 095	102-111	102 - 111	161	79,5	1,5x25	M6	M8 / M10	M8x80	10	6,9	2,3	30	6,42
KSS 100	4"	109 - 119	170	84	1,5x25	M6	M8 / M10	M8x80	10	6,9	2,3	30	6,72
KSS 110	122-135	122 - 135	184	90,5	2x25	M6	M8 / M10	M10x100	12	7,8	2,6	30	9,24
KSS 120	128-139	128 - 139	190	93,5	2x25	M6	M8 / M10	M10x100	12	7,8	2,6	20	8,68
KSS 125	5"	135 - 148	197	97	2x25	M6	M8 / M10	M10x100	12	7,8	2,6	25	8,35
KSS 140	151-164	151 - 164	213	105	2x25	M6	M8 / M10	M10x100	12	7,8	2,6	20	7,18
KSS 150	6"	158 - 170	222	109,5	2x25	M6	M8 / M10	M10x100	12	7,8	2,6	20	7,60
KSS 180	194-205	194 - 205	257	127	2x25	M6	M8 / M10	M10x100	12	7,8	2,6	10	4,31
KSS 200	8"	214 - 224	272	136	2x25	M6	M8 / M10	M10x100	12	7,8	2,6	10	4,54

Pipe Clamps

Pipe Clamp With Triphone




Mounting Example



Application / Uygulama

Used with pvc, pe, pp, cast iron, steel and copper pipes.

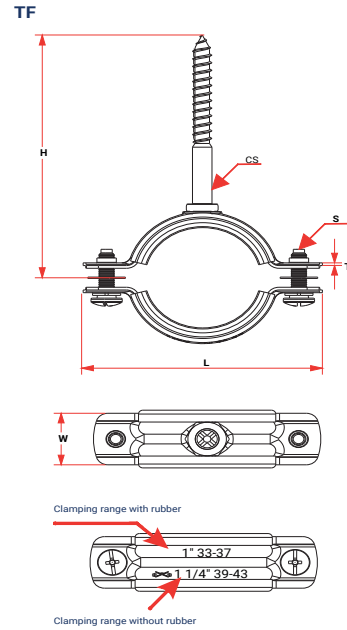

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

TF


CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	COACH SCREW (CS) (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT PER BOX AVERAGE KG
TF 006	1/8"	9 - 12	52,1	82	1x20	M5	Ø7x70	3,9	1,3	200	9,00
TF 008	1/4"	13 - 20	54,5	84	1x20	M5	Ø7x70	3,9	1,3	200	9,20
TF 010	3/8"	17 - 23	58,5	86	1x20	M5	Ø7x70	3,9	1,3	150	7,35
TF 015	1/2"	20 - 25	62,5	88	1x20	M5	Ø7x70	3,9	1,3	150	7,80
TF 020	3/4"	25 - 30	68,5	91	1x20	M5	Ø7x70	3,9	1,3	125	7,00
TF 025	1"	32 - 37	76	94,5	1x20	M5	Ø7x70	3,9	1,3	100	6,10
TF 032	1 1/4"	40 - 46	91,5	99	1,2x20	M5	Ø7x70	4,8	1,6	75	5,78
TF 040	1 1/2"	48 - 53	99	102,5	1,2x20	M5	Ø7x70	4,8	1,6	50	4,25
TF 047	53-59	53 - 59	105	105,5	1,2x20	M5	Ø7x70	4,8	1,6	50	4,45
TF 050	2"	60 - 66	112	109	1,2x20	M5	Ø7x70	4,8	1,6	50	4,75
TF 060	67-77	67 - 77	126	114	1,5x25	M6	Ø7x70	6,9	2,3	20	3,18
TF 065	2 1/2"	75 - 84	134	118	1,5x25	M6	Ø7x70	6,9	2,3	25	4,10
TF 075	83-93	83 - 93	142	122	1,5x25	M6	Ø7x70	6,9	2,3	20	3,54
TF 080	3"	87 - 96	145	123,5	1,5x25	M6	Ø7x70	6,9	2,3	20	3,64
TF 085	94-104	94 - 104	153	127,5	1,5x25	M6	Ø7x70	6,9	2,3	20	3,96
TF 095	102-111	102 - 111	161	131,5	1,5x25	M6	Ø7x70	6,9	2,3	15	3,09
TF 100	4"	109 - 119	170	136	1,5x25	M6	Ø7x70	6,9	2,3	15	3,23
TF 110	122-135	122 - 135	184	142,5	2x25	M6	Ø7x70	7,8	2,6	15	4,17
TF 120	128-139	128 - 139	190	145,5	2x25	M6	Ø7x70	7,8	2,6	10	2,97
TF 125	5"	135 - 148	197	149	2x25	M6	Ø7x70	7,8	2,6	10	3,10
TF 140	151-164	151 - 164	213	157	2x25	M6	Ø7x70	7,8	2,6	10	3,34
TF 150	6"	158 - 170	222	161,5	2x25	M6	Ø7x70	7,8	2,6	10	3,52
TF 180	194-205	194 - 205	257	179	2x25	M6	Ø7x70	7,8	2,6	5	3,98
TF 200	8"	214 - 224	272	188	2x25	M6	Ø7x70	7,8	2,6	5	2,11

Pipe Clamp With Triphone



Application / Uygulama

Used with pvc, pe, pp, cast iron, steel and copper pipes.

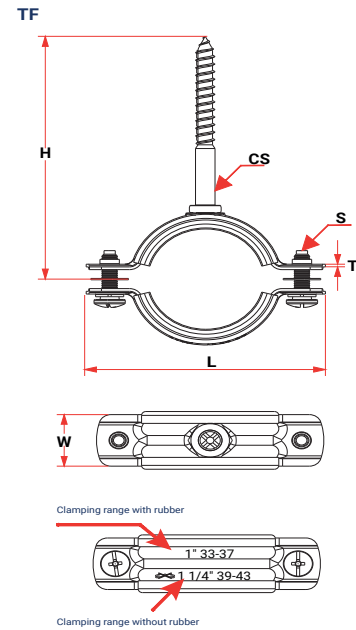


Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50 $^{\circ}$ C / +110 $^{\circ}$ C

TU

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	COACH SCREW (CS) (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT PER BOX AVERAGE KG
TU 006	1/8"	9 - 12	52,1	112,5	1x20	M5	Ø7x100	3,9	1,3	150	8,250
TU 008	1/4"	13 - 20	54,5	114	1x20	M5	Ø7x100	3,9	1,3	150	8,550
TU 010	3/8"	17 - 23	58,5	116	1x20	M5	Ø7x100	3,9	1,3	150	8,850
TU 015	1/2"	20 - 25	62,5	118	1x20	M5	Ø7x100	3,9	1,3	150	9,300
TU 020	3/4"	25 - 30	68,5	121	1x20	M5	Ø7x100	3,9	1,3	100	6,600
TU 025	1"	32 - 37	76	124,5	1x20	M5	Ø7x100	3,9	1,3	75	5,400
TU 032	1 1/4"	40 - 46	91,5	129	1,2x20	M5	Ø7x100	4,8	1,6	50	4,400
TU 040	1 1/2"	48 - 53	99	132,5	1,2x20	M5	Ø7x100	4,8	1,6	50	4,750
TU 047	53-59	53 - 59	105	135,5	1,2x20	M5	Ø7x100	4,8	1,6	50	4,950
TU 050	2"	60 - 66	112	139	1,2x20	M5	Ø7x100	4,8	1,6	40	4,240
TU 060	67-77	67 - 77	126	144	1,5x25	M6	Ø7x100	6,9	2,3	25	4,150
TU 065	2 1/2"	75 - 84	134	148	1,5x25	M6	Ø7x100	6,9	2,3	20	3,540
TU 075	83-93	83 - 93	142	152	1,5x25	M6	Ø7x100	6,9	2,3	20	3,740
TU 080	3"	87 - 96	145	153,5	1,5x25	M6	Ø7x100	6,9	2,3	20	3,840
TU 085	94-104	94 - 104	153	157,5	1,5x25	M6	Ø7x100	6,9	2,3	20	4,160
TU 095	102-111	102 - 111	161	161,5	1,5x25	M6	Ø7x100	6,9	2,3	15	3,240
TU 100	4"	109 - 119	170	166	1,5x25	M6	Ø7x100	6,9	2,3	15	3,380
TU 110	122-135	122 - 135	184	172,5	2x25	M6	Ø7x100	7,8	2,6	15	4,320
TU 120	128-139	128 - 139	190	175,5	2x25	M6	Ø7x100	7,8	2,6	10	3,07
TU 125	5"	135 - 148	197	179	2x25	M6	Ø7x100	7,8	2,6	10	3,20
TU 140	151-164	151 - 164	213	187	2x25	M6	Ø7x100	7,8	2,6	10	3,44
TU 150	6"	158 - 170	222	191,5	2x25	M6	Ø7x100	7,8	2,6	10	3,62
TU 180	194-205	194 - 205	257	209	2x25	M6	Ø7x100	7,8	2,6	5	2,04
TU 200	8"	214 - 224	272	218	2x25	M6	Ø7x100	7,8	2,6	5	2,16

Pipe Clamps

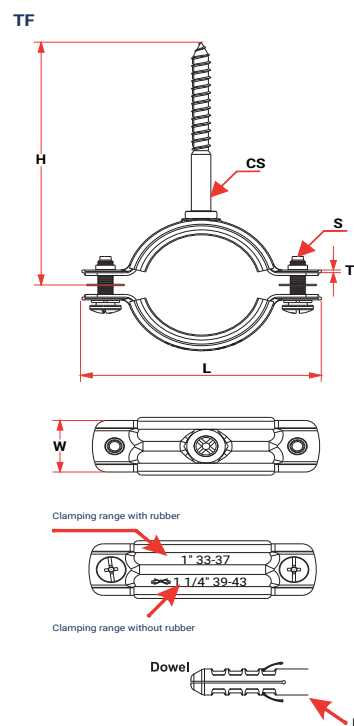

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

TF

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	COACH SCREW (CS) (mm)	DOWEL (D) (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT PER BOX AVERAGE KG
TFS 006	1/8"	9 - 12	52,1	82	1x20	M5	Ø7x70	10	3,9	1,3	200	9,71
TFS 008	1/4"	13 - 20	54,5	84	1x20	M5	Ø7x70	10	3,9	1,3	200	9,94
TFS 010	3/8"	17 - 23	58,5	86	1x20	M5	Ø7x70	10	3,9	1,3	150	8,06
TFS 015	1/2"	20 - 25	62,5	88	1x20	M5	Ø7x70	10	3,9	1,3	150	8,36
TFS 020	3/4"	25 - 30	68,5	91	1x20	M5	Ø7x70	10	3,9	1,3	125	7,59
TFS 025	1"	32 - 37	76	94,5	1x20	M5	Ø7x70	10	3,9	1,3	100	6,67
TFS 032	1 1/4"	40 - 46	91,5	99	1,2x20	M5	Ø7x70	10	4,8	1,6	75	6,13
TFS 040	1 1/2"	48 - 53	99	102,5	1,2x20	M5	Ø7x70	10	4,8	1,6	50	4,49
TFS 047	53-59	53 - 59	105	105,5	1,2x20	M5	Ø7x70	10	4,8	1,6	50	4,74
TFS 050	2"	60 - 66	112	109	1,2x20	M5	Ø7x70	10	4,8	1,6	50	5,04
TFS 060	67-77	67 - 77	126	114	1,5x25	M6	Ø7x70	10	6,9	2,3	20	3,21
TFS 065	2 1/2"	75 - 84	134	118	1,5x25	M6	Ø7x70	10	6,9	2,3	25	4,14
TFS 075	83-93	83 - 93	142	122	1,5x25	M6	Ø7x70	10	6,9	2,3	20	3,57
TFS 080	3"	87 - 96	145	123,5	1,5x25	M6	Ø7x70	10	6,9	2,3	20	3,67
TFS 085	94-104	94 - 104	153	127,5	1,5x25	M6	Ø7x70	10	6,9	2,3	20	3,99
TFS 095	102-111	102 - 111	161	131,5	1,5x25	M6	Ø7x70	10	6,9	2,3	15	3,11
TFS 100	4"	109 - 119	170	136	1,5x25	M6	Ø7x70	10	6,9	2,3	15	3,24
TFS 110	122-135	122 - 135	184	142,5	2x25	M6	Ø7x70	10	7,8	2,6	15	4,20
TFS 120	128-139	128 - 139	190	145,5	2x25	M6	Ø7x70	10	7,8	2,6	10	2,99
TFS 125	5"	135 - 148	197	149	2x25	M6	Ø7x70	10	7,8	2,6	10	3,12
TFS 140	151-164	151 - 164	213	157	2x25	M6	Ø7x70	10	7,8	2,6	10	3,36
TFS 150	6"	158 - 170	222	161,5	2x25	M6	Ø7x70	10	7,8	2,6	10	3,54
TFS 180	194-205	194 - 205	257	179	2x25	M6	Ø7x70	10	7,8	2,6	5	2,01
TFS 200	8"	214 - 224	272	188	2x25	M6	Ø7x70	10	7,8	2,6	5	2,12


Heavy Duty Pipe Clamp with Head





Application / Uygulama

Used with HDPE, Cast Iron, Steel and Wavin pipes.

Mounting Example

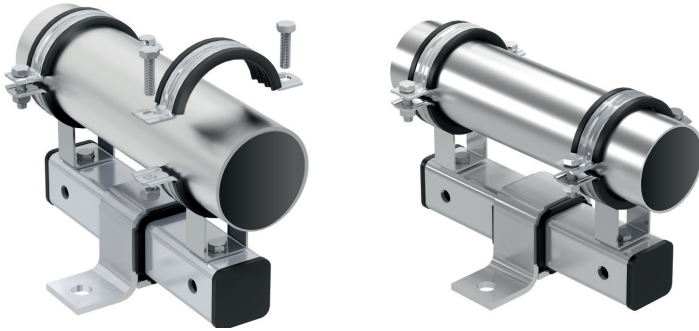

AK

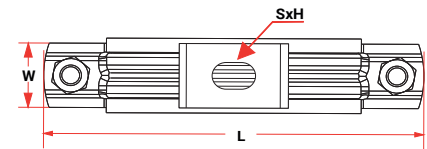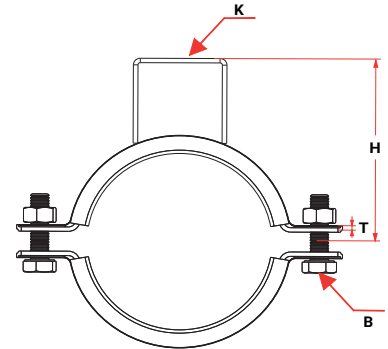

Material:

Steel

Standard Finish:

Zinc Plated

Hardness of Rubber Lining:

55 $\pm$ 5 Shore A

Isolation Rubber:

Standard TPE, on request EPDM

Temperature Resistance:

-50°C / +110°C

AK


CODE	SIZE	CLAMPING RANGE	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	HEAD (K) (mm)	SLOT HOLE (SxH) (mm)	BOLT (B) (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX	WEIGHT AVERAGE (kg)
AK 008	1/4"	12 - 17	75	40	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	50	7,35
AK 015	1/2"	21 - 28	81	41	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	50	7,75
AK 020	3/4"	25 - 32	87	42,5	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	50	8,20
AK 025	1	33 - 40	94	49,5	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	50	8,65
AK 032	1 1/4"	41 - 48	103	55	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	40	7,24
AK 040	1 1/2"	48 - 53	111	59	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	40	7,68
AK 047	53 - 59	53 - 59	120	63	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	30	6,57
AK 050	2"	60 - 69	125	66	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	30	6,33
AK 060	67 - 75	67 - 75	134	70	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	25	7,00
AK 065	2 1/2"	75 - 81	141	74	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	25	5,93
AK 075	83-91	83 - 91	149	78	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	30	7,62
AK 080	3"	87 - 95	154	80	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	30	7,56
AK 085	95 - 104	95 - 104	161	84,5	2x25	2x25x40	10,5x14	M8 (6,8)	10	2,75	25	7,20
AK 095	102 - 112	102 - 112	169	88,5	2,5x30	3x30x40	12x14	M8 (6,8)	14	3,75	25	10,15
AK 100	4"	109 - 119	178	93	2,5x30	3x30x40	12x14	M8 (6,8)	14	3,75	25	10,73
AK 110	122 - 138"	122 - 138	192	101	3x30	3x30x40	12x14	M10 (8,8)	20	6	10	5,70
AK 120	128 - 141	128 - 141	197	103,5	3x30	3x30x40	12x14	M10 (8,8)	20	6	10	5,99
AK 125	5"	136 - 147	204	107	3x30	3x30x40	12x14	M10 (8,8)	20	6	10	6,02
AK 140	153 - 164	153 - 164	220	115	3x30	3x30x40	12x14	M10 (8,8)	20	6	10	6,45
AK 150	6"	164 - 174	229	120	3x30	3x30x40	12x14	M10 (8,8)	20	6	10	6,79
AK 180	196 - 209	196 - 209	264	137	3x30	3x30x40	12x14	M10 (8,8)	20	6	20	15,20
AK 200	8"	214 - 226	279	145	4x30	4x30x40	12x14	M10 (8,8)	20	6	15	15,23
AK 240	240 - 250	240 - 250	310	170	4x30	4x40x40	12x14	M10 (8,8)	20	6	15	16,01
AK 250	10"	266 - 274	335	173	4x30	4x30x40	12x14	M10 (8,8)	20	6	15	18,45
AK 300	12"	308 - 324	400	184	4x40	4x40x40	12,5x23	M12 (8,8)	35	11,7	10	19,10
AK 350	14"	340 - 356	432	221	4x40	4x40x40	12,5x23	M12 (8,8)	35	11,7	8	16,78
AK 380	380 - 390	380 - 390	505	253	5x50	5x50x60	17x25	M16 (8,8)	37	13	5	18,10
AK 400	16"	393 - 409	537	265	5x50	5x50x60	17x25	M16 (8,8)	37	13	5	19,91
AK 450	18"	444 - 460	590	301	5x50	5x50x60	17x25	M16 (8,8)	37	13	5	21,91
AK 500	20"	497 - 512	645	325	5x50	5x50x60	17x25	M16 (8,8)	37	13	4	19,12

Pipe Clamps

Heavy Duty Pipe Clamps With Combi Nut



AKS

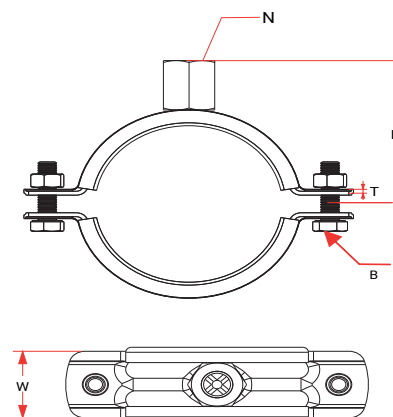

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

AKS

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	NUT (N) (Metric)	BOLT (B) (Metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT AVERAGE (kg)
AKS 008	1/4"	12 - 17	75	34	2x25	M10 / M12	M8 (6.8)	10.00	2.75	50	6.77
AKS 015	1/2"	21 - 28	81	38	2x25	M10 / M12	M8 (6.8)	10.00	2.75	50	7.42
AKS 020	3/4"	25 - 32	87	41	2x25	M10 / M12	M8 (6.8)	10.00	2.75	50	7.84
AKS 025	1"	33 - 40	94	44.5	2x25	M10 / M12	M8 (6.8)	10.00	2.75	50	8.41
AKS 032	1 1/4"	41 - 48	103	49	2x25	M10 / M12	M8 (6.8)	10.00	2.75	50	8.96
AKS 040	1 1/2"	48 - 53	111	52.5	2x25	M10 / M12	M8 (6.8)	10.00	2.75	50	9.64
AKS 047	53-59	53 - 59	120	56.5	2x25	M10 / M12	M8 (6.8)	10.00	2.75	40	8.10
AKS 050	2"	60 - 69	125	59	2x25	M10 / M12	M8 (6.8)	10.00	2.75	40	8.51
AKS 060	67-75	67 - 75	134	63	2x25	M10 / M12	M8 (6.8)	10.00	2.75	40	8.97
AKS 065	2 1/2"	75 - 81	141	67	2x25	M10 / M12	M8 (6.8)	10.00	2.75	30	7.36
AKS 075	83-91	83 - 91	149	71	2x25	M10 / M12	M8 (6.8)	10.00	2.75	30	7.58
AKS 080	3"	87 - 95	154	73	2x25	M10 / M12	M8 (6.8)	10.00	2.75	30	7.97
AKS 085	95-104	95 - 104	161	77	2x25	M10 / M12	M8 (6.8)	10.00	2.75	30	8.13
AKS 095	102-112	102 - 112	169	81	2,5x30	M10 / M12	M8 (6.8)	14.00	3.75	30	11.52
AKS 100	4"	109 - 119	178	86.6	2,5x30	M10 / M12	M8 (6.8)	14.00	3.75	30	12.29
AKS 110	122-138	122 - 138	192	99.1	3x30	M12 / M16	M10 (8.8)	20.00	6.00	20	11.88
AKS 120	128-141	128 - 141	197	101.6	3x30	M12 / M16	M10 (8.8)	20.00	6.00	10	6.18
AKS 125	5"	136 - 147	204	105.1	3x30	M12 / M16	M10 (8.8)	20.00	6.00	10	6.61
AKS 140	153-164	153 - 164	220	113.1	3x30	M12 / M16	M10 (8.8)	20.00	6.00	10	6.77
AKS 150	6"	164 - 174	229	117.6	3x30	M12 / M16	M10 (8.8)	20.00	6.00	10	7.01
AKS 180	196-209	196 - 209	264	135.1	3x30	M12 / M16	M10 (8.8)	20.00	6.00	20	15.67
AKS 200	8"	214 - 226	279	142.6	4x30	M12 / M16	M10 (8.8)	20.00	6.00	15	15.53
AKS 240	240-250	240 - 250	310	157	4x30	M12 / M16	M10 (8.8)	20.00	6.00	15	17.18
AKS 250	10"	266 - 274	335	170.8	4x30	M12 / M16	M10 (8.8)	20.00	6.00	15	18.35
AKS 300	12"	308 - 324	400	193.8	4x40	M12 / M16	M12 (8.8)	35.00	11.70	10	18.47
AKS 350	14"	340 - 356	432	209.8	4x40	M12 / M16	M12 (8.8)	35.00	11.70	10	20.05
AKS 380	380-390	380 - 390	505	223	5x50	M12 / M16	M16 (8.8)	37.00	13.00	5	17.81
AKS 400	16"	393 - 409	537	239	5x50	M12 / M16	M16 (8.8)	37.00	13.00	5	18.65
AKS 450	18"	444 - 460	590	269.5	5x50	M12 / M16	M16 (8.8)	37.00	13.00	5	20.50
AKS 500	20"	497 - 512	645	295	5x50	M12 / M16	M16 (8.8)	37.00	13.00	4	18.12

Heavy Duty Pipe Clamp without Nut, Set



Application / Uygulama

Used with HDPE, Cast Iron, Steel and Wavin pipes.


Package View & Mounting Example



ASC pipe clamp includes 4 hex nut, 4 flat washer and 2 dowels



ACS

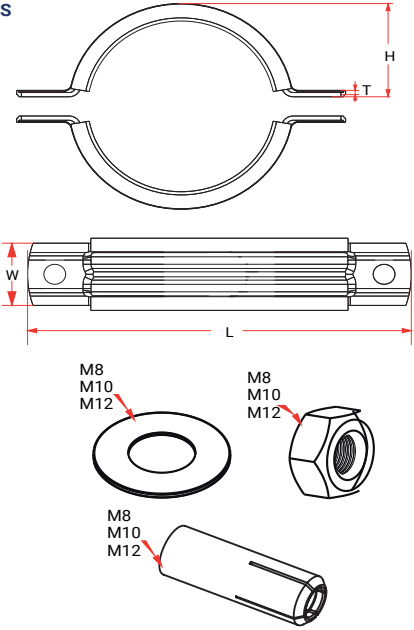

Material / Malzeme:

Steel / Çelik

Standard Finish / Standard Kaplama:

Zinc Plated / Elektro galvaniz

Hardness of Rubber Lining / Kelepçe Lastiği Sertliği

55 $\pm$ 5 Shore A

Isolation Rubber / İzolasyon Lastiği

Standard TPE, on request EPDM

Standard TPE, isteğe bağlı EPDM

Temperature Resistance / Sıcaklık Dayanımı

-50°C / +110°C

ACS

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	DOWEL 2 PC (metric)	NUT & WASHER 4 PC each (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT AVERAGE (kg)
ACS 008	1/4"	12 - 17	75	26	2x25	M8x30	M8	10,00	2,75	50	6,00
ACS 015	1/2"	21 - 28	81	30	2x25	M8x30	M8	10,00	2,75	50	6,65
ACS 020	3/4"	25 - 32	87	33	2x25	M8x30	M8	10,00	2,75	50	7,05
ACS 025	1"	33 - 40	94	36,5	2x25	M8x30	M8	10,00	2,75	50	7,65
ACS 032	1 1/4"	41 - 48	103	41	2x25	M8x30	M8	10,00	2,75	50	8,20
ACS 040	1 1/2"	48 - 53	111	44,5	2x25	M8x30	M8	10,00	2,75	50	8,85
ACS 047	53-59	53 - 59	120	48,5	2x25	M8x30	M8	10,00	2,75	40	7,48
ACS 050	2"	60 - 69	125	51	2x25	M8x30	M8	10,00	2,75	40	7,88
ACS 060	67-75	67 - 75	134	55	2x25	M8x30	M8	10,00	2,75	40	8,36
ACS 065	2 1/2"	75 - 81	141	59	2x25	M8x30	M8	10,00	2,75	30	6,90
ACS 075	83-91	83 - 91	149	63	2x25	M8x30	M8	10,00	2,75	30	7,14
ACS 080	3"	87 - 95	154	65	2x25	M8x30	M8	10,00	2,75	30	7,53
ACS 085	95-104	95 - 104	161	69	2x25	M8x30	M8	10,00	2,75	30	7,68
ACS 095	102-112	102 - 112	169	73	2,5x30	M10x40	M10	14,00	3,75	30	12,33
ACS 100	4"	109 - 119	178	78,6	2,5x30	M10x40	M10	14,00	3,75	30	13,11
ACS 110	122-138	122 - 138	192	90,1	3x30	M10x40	M10	20,00	6,00	20	10,56
ACS 120	128-141	128 - 141	197	92,6	3x30	M10x40	M10	20,00	6,00	10	5,50
ACS 125	5"	136 - 147	204	96,1	3x30	M10x40	M10	20,00	6,00	10	5,93
ACS 140	153-164	153 - 164	220	104,1	3x30	M10x40	M10	20,00	6,00	10	6,09
ACS 150	6"	164 - 174	229	108,6	3x30	M10x40	M10	20,00	6,00	10	6,33
ACS 180	196-209	196 - 209	264	126,1	3x30	M10x40	M10	20,00	6,00	20	14,34
ACS 200	8"	214 - 226	279	133,6	4x30	M10x40	M10	20,00	6,00	15	14,54
ACS 240	240-250	240 - 250	310	148	4x30	M10x40	M10	20,00	6,00	15	15,92
ACS 250	10"	266 - 274	335	161,8	4x30	M10x40	M10	20,00	6,00	15	18,56
ACS 300	12"	308 - 324	400	184,8	4x40	M10x40	M10	35,00	11,70	10	18,16
ACS 350	14"	340 - 356	432	200,8	4x40	M10x40	M10	35,00	11,70	10	19,74
ACS 380	380-390	380 - 390	505	214	5x50	M12x50	M12	37,00	13,00	5	17,58
ACS 400	16"	393 - 409	537	230	5x50	M12x50	M12	37,00	13,00	5	18,42
ACS 450	18"	444 - 460	590	260,5	5x50	M12x50	M12	37,00	13,00	5	20,26
ACS 500	20"	497 - 512	645	286	5x50	M12x50	M12	37,00	13,00	4	17,93

Pipe Clamps



Heavy Duty Pipe Clamp with Nut



Application / Uygulama

Used with HDPE, Cast Iron, Steel and Wavin pipes.

Mounting Example

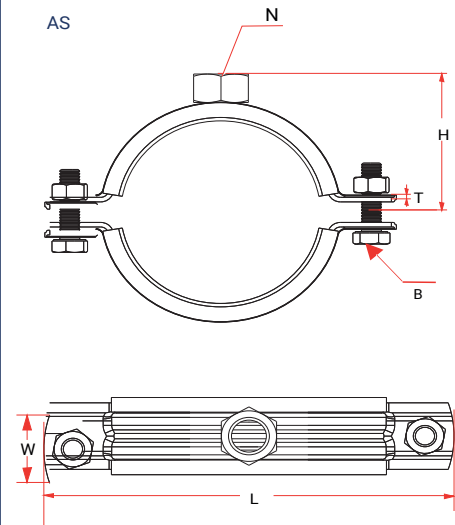
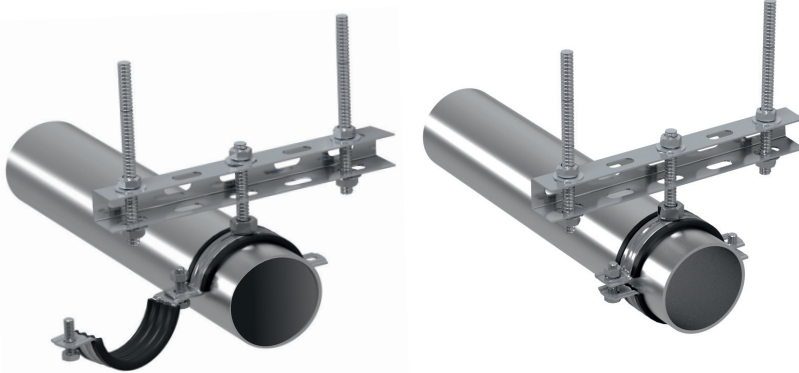


Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

AS

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	NUT (N) (metric)	BOLT (B) (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT AVERAGE (kg)
AS 008	1/4"	12 - 17	75	26	2x25	M12	M8 (6,8)	10	2,75	50	6,35
AS 015	1/2"	21 - 28	81	30	2x25	M12	M8 (6,8)	10	2,75	50	7,00
AS 020	3/4"	25 - 32	87	33	2x25	M12	M8 (6,8)	10	2,75	50	7,40
AS 025	1"	33 - 40	94	36,5	2x25	M12	M8 (6,8)	10	2,75	50	8,00
AS 032	1 1/4"	41 - 48	103	41	2x25	M12	M8 (6,8)	10	2,75	50	8,55
AS 040	1 1/2"	48 - 53	111	44,5	2x25	M12	M8 (6,8)	10	2,75	50	9,20
AS 047	53-59	53 - 59	120	48,5	2x25	M12	M8 (6,8)	10	2,75	40	7,76
AS 050	2"	60 - 69	125	51	2x25	M12	M8 (6,8)	10	2,75	40	8,16
AS 060	67-75	67 - 75	134	55	2x25	M12	M8 (6,8)	10	2,75	40	8,64
AS 065	2 1/2"	75 - 81	141	59	2x25	M12	M8 (6,8)	10	2,75	30	7,11
AS 075	83-91	83 - 91	149	63	2x25	M12	M8 (6,8)	10	2,75	30	7,32
AS 080	3"	87 - 95	154	65	2x25	M12	M8 (6,8)	10	2,75	30	7,74
AS 085	95-104"	95 - 104	161	69	2x25	M12	M8 (6,8)	10	2,75	30	7,89
AS 095	102-112	102 - 112	169	73	2,5x30	M12	M8 (6,8)	14	3,75	30	11,28
AS 100	4"	109 - 119	178	78,6	2,5x30	M12	M8 (6,8)	14	3,75	30	12,06
AS 110	122-138	122 - 138	192	90,1	3x30	M16	M10 (8,8)	20	6	20	11,38
AS 120	128-141	128 - 141	197	92,6	3x30	M16	M10 (8,8)	20	6	10	5,91
AS 125	5"	136 - 147	204	96,1	3x30	M16	M10 (8,8)	20	6	10	6,34
AS 140	153-164	153 - 164	220	104,1	3x30	M16	M10 (8,8)	20	6	10	6,50
AS 150	6"	164 - 174	229	108,6	3x30	M16	M10 (8,8)	20	6	10	6,74
AS 180	196-209	196 - 209	264	126,1	3x30	M16	M10 (8,8)	20	6	20	15,16
AS 200	8"	214 - 226	279	133,6	4x30	M16	M10 (8,8)	20	6	15	15,15
AS 240	240-250	240 - 250	310	148	4x30	M16	M10 (8,8)	20	6	15	16,80
AS 250	10"	266 - 274	335	161,8	4x30	M16	M10 (8,8)	20	6	15	17,97
AS 300	12"	308 - 324	400	184,8	4x40	M16	M12 (8,8)	35	11,7	10	18,22
AS 350	14"	340 - 356	432	200,8	4x40	M16	M12 (8,8)	35	11,7	10	19,80
AS 380	380-390	380 - 390	505	214	5x50	M16	M16 (8,8)	37	13	5	17,69
AS 400	16"	393 - 409	537	230	5x50	M16	M16 (8,8)	37	13	5	18,53
AS 450	18"	444 - 460	590	260,5	5x50	M16	M16 (8,8)	37	13	5	20,37
AS 500	20"	497 - 512	645	286	5x50	M16	M16 (8,8)	37	13	4	18,02



Pipe Clamps

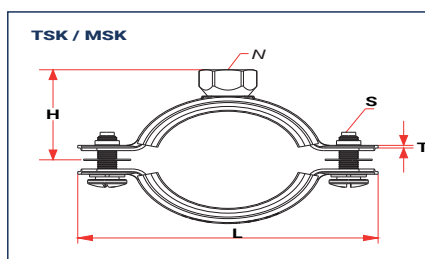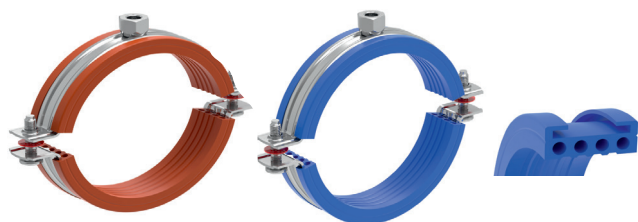

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

Orange	Blue											
CODE	CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	NUT (N) (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT (AVERAGE) (kg)
TSK 050	MSK 050	Ø50	49-51	105	45,5	1,2x20	M5x18	M8	4,8	1,6	75	7,13
TSK 075	MSK 075	Ø75	70-76	134	60	1,5x25	M6x30	M10	6,9	2,3	40	7,20
TSK 110	MSK 110	Ø110	106-114	170	78	1,5x25	M6x30	M10	6,9	2,3	30	7,05
TSK 125	MSK 125	Ø125	124-130	184	84,5	2X25	M6x35	M10	7,8	2,6	30	9,15
TSK 160	MSK 160	Ø160	155-162	222	103,5	2X25	M6x30	M10	7,8	2,6	20	7,68
TSK 200	MSK 200	Ø200	191-200	257	121	2X25	M6x30	M12	7,8	2,6	15	6,74



Silent Pipe Clamps Without Nut

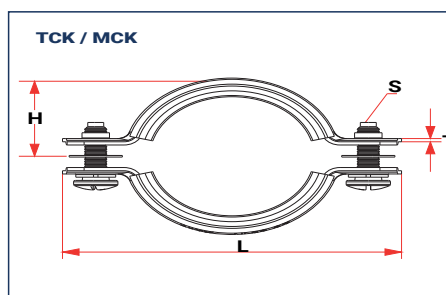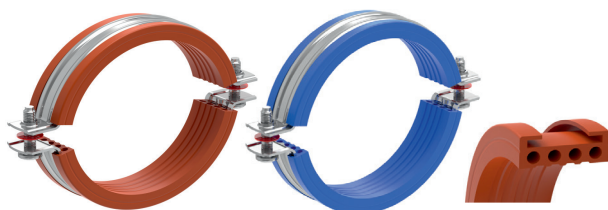

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

Orange	Blue									Resistance: -50°C / +110°C	
CODE	CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT (AVERAGE) (kg)
TCK 050	MCK 050	Ø50	49-51	105	35,5	1,2x20	M5x18	4,8	1,6	75	6,60
TCK 075	MCK 075	Ø75	70-76	134	48	1,5x25	M6x30	6,9	2,3	40	6,60
TCK 110	MCK 110	Ø110	106-114	170	66	1,5x25	M6x30	6,9	2,3	30	6,60
TCK 125	MCK 125	Ø125	124-130	184	72,5	2X25	M6x35	7,8	2,6	30	8,73
TCK 160	MCK 160	Ø160	155-162	222	91,5	2X25	M6x30	7,8	2,6	20	7,40
TCK 200	MCK 200	Ø200	191-200	257	109	2X25	M6x30	7,8	2,6	15	6,47

Silent Pipe Clamps With Triphone

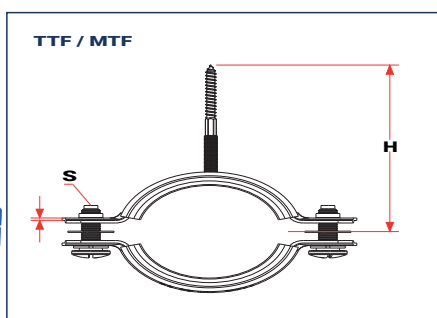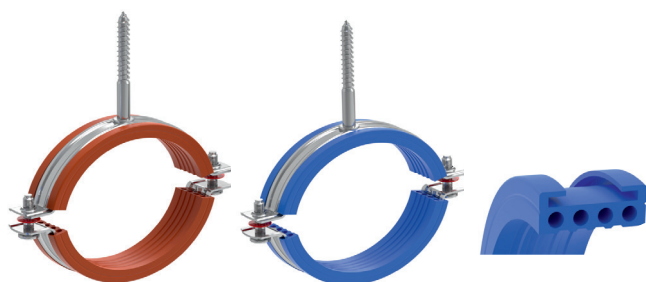


Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

Orange	Blue											
CODE	CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	COACH SCREW (CS) (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT (AVERAGE) (kg)
TTF 050	MTF 050	Ø50	49-51	105	35,5	1,2x20	M5x18	Ø7x70	4,8	1,6	75	6,60
TTF 075	MTF 075	Ø75	70-76	134	48	1,5x25	M6x30	Ø7x70	6,9	2,3	40	6,60
TTF 110	MTF 110	Ø110	106-114	170	66	1,5x25	M6x30	Ø7x70	6,9	2,3	30	6,60
TTF 125	MTF 125	Ø125	124-130	184	72,5	2X25	M6x35	Ø7x70	7,8	2,6	30	8,73
TTF 160	MTF 160	Ø160	155-162	222	91,5	2X25	M6x30	Ø7x70	7,8	2,6	20	7,40
TTF 200	MTF 200	Ø200	191-200	257	109	2X25	M6x30	Ø7x70	7,8	2,6	15	6,47

Pipe Clamps


Silent Pipe Clamps With Nuts

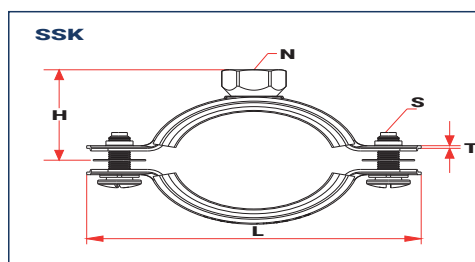

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	NUT (N) (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT (AVERAGE) (kg)
SSK 050	Ø50	49-51	105	45,5	1,2x20	M5x18	M8	4,8	1,6	75	7,13
SSK 075	Ø75	70-76	134	60	1,5x25	M6x30	M10	6,9	2,3	40	7,20
SSK 110	Ø110	106-114	170	78	1,5x25	M6x30	M10	6,9	2,3	30	7,05
SSK 125	Ø125	124-130	184	84,5	2X25	M6x35	M10	7,8	2,6	30	9,15
SSK 160	Ø160	155-162	222	103,5	2X25	M6x30	M10	7,8	2,6	20	7,68
SSK 200	Ø200	191-200	257	121	2X25	M6x30	M12	7,8	2,6	15	6,74


Silent Pipe Clamp Without Nut (Black)

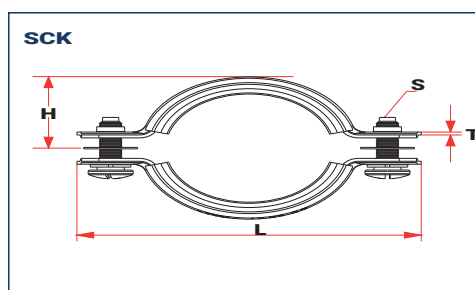

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT (AVERAGE) (kg)
SCK 050	Ø50	49-51	105	35,5	1,2x20	M5x18	4,8	1,6	75	6,60
SCK 075	Ø75	70-76	134	48	1,5x25	M6x30	6,9	2,3	40	6,60
SCK 110	Ø110	106-114	170	66	1,5x25	M6x30	6,9	2,3	30	6,60
SCK 125	Ø125	124-130	184	72,5	2X25	M6x35	7,8	2,6	30	8,73
SCK 160	Ø160	155-162	222	91,5	2X25	M6x30	7,8	2,6	20	7,40
SCK 200	Ø200	191-200	257	109	2X25	M6x30	7,8	2,6	15	6,47

Silent Pipe Clamps With Triphone (Black)

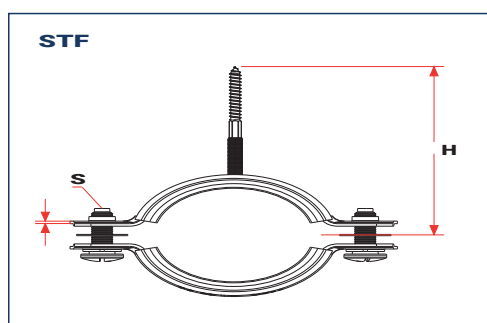

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C


CODE	SIZE	CLAMPING RANGE (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	SCREW (S) (metric)	COACH SCREW (CS) (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (Pcs)	WEIGHT (AVERAGE) (kg)
STF 050	Ø50	49-51	105	105	1,2x20	M5x18	Ø7x70	4,8	1,6	75	7,13
STF 075	Ø75	70-76	134	118	1,5x25	M6x30	Ø7x70	6,9	2,3	40	7,20
STF 110	Ø110	106-114	170	136	1,5x25	M6x30	Ø7x70	6,9	2,3	30	7,05
STF 125	Ø125	124-130	190	142,5	2X25	M6x35	Ø7x70	7,8	2,6	30	9,15
STF 160	Ø160	155-162	222	161,5	2X25	M6x30	Ø7x70	7,8	2,6	20	7,68
STF 200	Ø200	191-200	257	179	2X25	M6x30	Ø7x70	7,8	2,6	15	6,74





Application / Uygulama

Used with Fire protection pipes. Designed for suspending pipes allowing for vertical adjustment. The clamp should only be used for horizontal pipe hanging. Loads are complied with NFPA standards.

Mounting Example

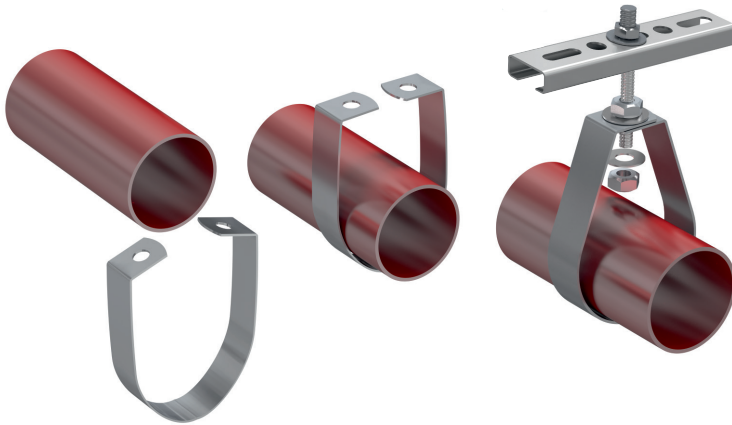

SPR

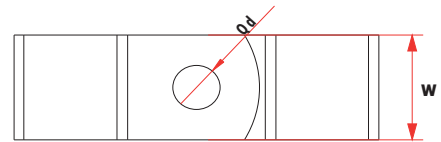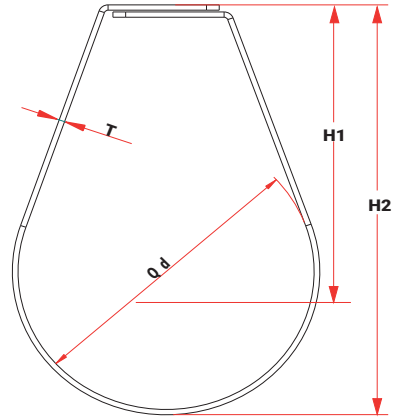

Material:
Steel
Standard Finish:
Zinc Plated

CODE	SIZE	DIAMETER (ØD) (mm)	HEIGHT 1 (H1) (mm)	HEIGHT 2 (H2) (mm)	SHEET (TxW) (mm)	HOLE DIA. ØD (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (pc)	WEIGHT (AVERAGE) (kg)
SPR 015	1/2"	28	36,5	51,5	1x25	10,5	6	1,5	150	5,25
SPR 020	3/4"	30	37,5	53,5	1x25	10,5	6	1,5	125	4,50
SPR 025	1"	36	46,5	65,5	1x25	10,5	6	1,5	100	4,20
SPR 032	1 1/4"	46	55,7	79,9	1,2x25	10,5	11	1,5	75	4,50
SPR 040	1 1/2"	52	58,7	85,9	1,2x25	10,5	11	1,5	60	3,84
SPR 050	2"	66	65,7	99,9	1,2x25	10,5	11	1,5	50	3,70
SPR 065	2 1/2"	78	75,5	116	1,5x25	10,5	16	3,9	35	3,71
SPR 080	3"	92	84,5	132	1,5x25	10,5	16	3,9	25	3,05
SPR 100	4"	116	107,5	167,5	2x25	10,5	19	3,9	30	5,97
SPR 125	5"	142	126,5	200	2,5x25	13	22	7,5	30	8,85
SPR 150	6"	170	150,5	238	2,5x25	13	22	7,5	30	10,32
SPR 200	8"	222	197,5	311,5	3x30	17	30	13	10	6,79
SPR 250	10"	275	244	384,5	3x30	17	30	13	15	11,91
SPR 300	12"	324	310	470	3x30	17	30	13	10	9,34

Pipe Clamps


Sprinkler Pipe Clamp Long





Application / Uygulama

Used with Fire protection pipes. Designed for suspending pipes allowing for vertical adjustment.
The clamp should only be used for horizontal pipe hanging. Loads are complied with NFPA standards.

Mounting Example

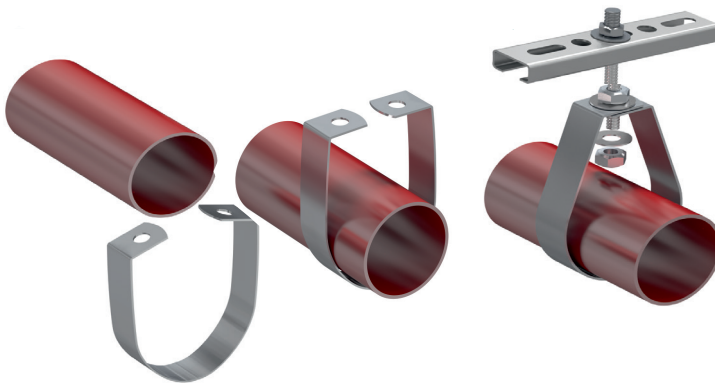

SPRU

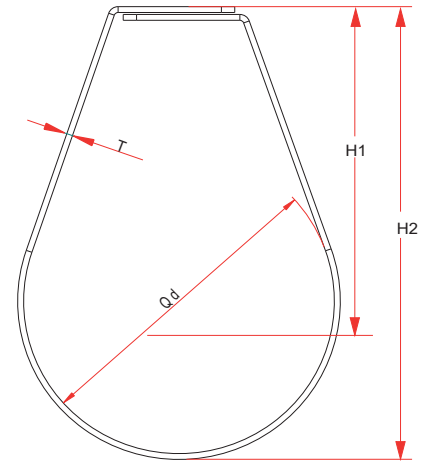

Material:
Steel
Standard Finish:
Zinc Plated

SPRU

CODE	SIZE	DIAMETER (ØD) (mm)	HEIGHT 1 (H1) (mm)	HEIGHT 2 (H2) (mm)	SHEET (TxW) (mm)	HOLE DIA. ØD (mm)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (pc)	WEIGHT (AVERAGE) (kg)
SPRU 015	1/2"	28	48	63,5	1,5x25	10,5	1,5	1,5	100	6,10
SPRU 020	3/4"	30	50	66,5	1,5x25	10,5	1,5	1,5	100	6,40
SPRU 025	1"	36	59	78,5	1,5x25	10,5	1,5	1,5	75	5,40
SPRU 032	1 1/4"	46	63	87,5	1,5x25	10,5	1,5	1,5	50	4,25
SPRU 040	1 1/2"	52	66	93,5	1,5x25	10,5	1,5	1,5	50	4,50
SPRU 050	2"	66	72	106,5	1,5x25	10,5	1,5	1,5	40	4,16
SPRU 065	2 1/2"	78	94	135,5	2,5x25	10,5	3,9	3,9	30	6,06
SPRU 080	3"	92	101	149,5	2,5x25	10,5	3,9	3,9	25	5,83
SPRU 100	4"	116	122	182,5	2,5x25	10,5	3,9	3,9	30	8,13
SPRU 125	5"	142	151,5	225,5	3x25	13	7,5	7,5	25	9,73
SPRU 150	6"	170	176,5	264,5	3x25	13	7,5	7,5	20	8,96
SPRU 200	8"	222	226,5	340,5	3x40	17	13	13	10	9,67
SPRU 250	10"	275	285,5	426	3x40	17	13	13	10	12,23

Sprinkler Pipe Clamp with Nut




SPRS pipe clamp includes rivet nut.



Application / Uygulama

Used with Fire protection pipes. Designed for suspending pipes allowing for vertical adjustment. The clamp should only be used for horizontal pipe hanging. Loads are complied with NFPA standards.

Mounting Example

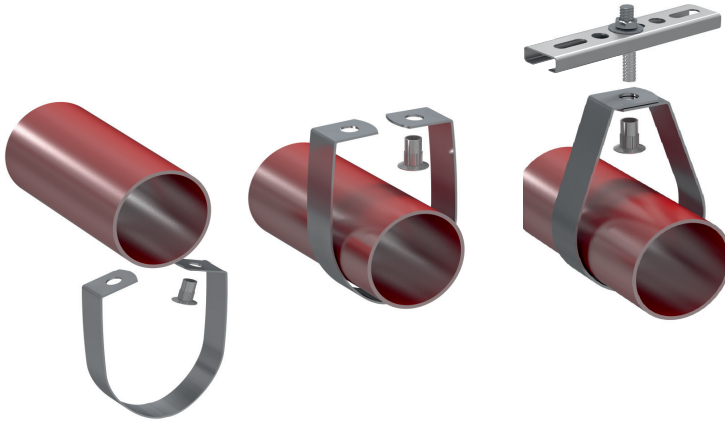

SPRS

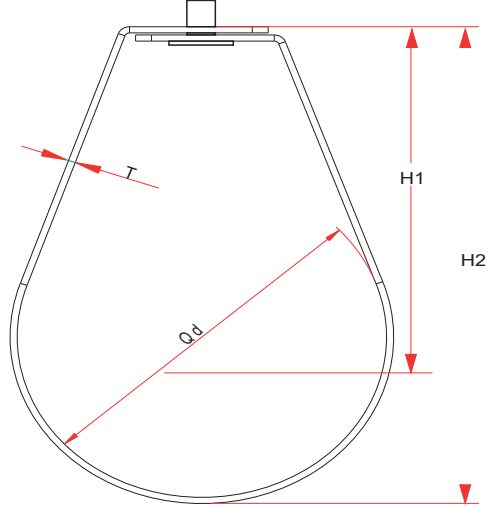

Material:
Steel
Standard Finish:
Zinc Plated / Elektro galvaniz

SPRS

CODE	SIZE	DIAMETER (ØD) (mm)	HEIGHT 1 (H1) (mm)	HEIGHT 2 (H2) (mm)	SHEET (TxW) (mm)	NUT ØD (metric)	BREAKING LOAD (kN)	RECOMMENDED LOAD (kN)	QUANTITY PER BOX (pc)	WEIGHT (AVERAGE) (kg)
SPRS 015	1/2"	28	36,5	51,5	1x25	M10	6,0	1,5	150	6,15
SPRS 020	3/4"	30	37,5	53,5	1x25	M10	6,0	1,5	125	5,25
SPRS 025	1"	36	46,5	65,5	1x25	M10	6,0	1,5	100	4,80
SPRS 032	1 1/4"	46	55,7	79,9	1,2x25	M10	11,0	1,5	75	4,95
SPRS 040	1 1/2"	52	58,7	85,9	1,2x25	M10	11,0	1,5	60	4,20
SPRS 050	2"	66	65,7	99,9	1,2x25	M10	11,0	1,5	50	4,00
SPRS 065	2 1/2"	78	75,5	116	1,5x25	M10	16,0	3,9	35	3,92
SPRS 080	3"	92	84,5	132	1,5x25	M10	16,0	3,9	25	3,20
SPRS 100	4"	116	107,5	167,5	2x25	M10	19,0	3,9	30	6,24
SPRS 125	5"	142	126,5	200	2,5x25	M12	22,0	7,5	30	9,12
SPRS 150	6"	170	150,5	238	2,5x25	M12	22,0	7,5	30	10,59
SPRS 200	8"	222	197,5	311,5	3x30	M12	25,0	13	10	6,96
SPRS 250	10"	275	244	384,5	3x30	M12	25,0	13	15	12,17
SPRS 300	12"	324	310	470	3x30	M12	25,0	13	10	9,51

Pipe Clamps

PVC Pipe Clamp




Application / Uygulama

Used with PVC, PE and HDPE pipes.

Mounting Example



PBK

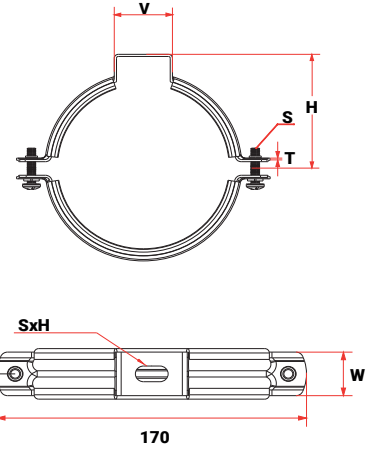

Material:

Steel

Standard Finish:

Zinc Plated

Hardness of Rubber Lining:

55 $\pm$ 5 Shore A

Isolation Rubber:

Standard TPE, on request EPDM

Temperature Resistance:

-50°C / +110°C

PBK

CODE	SIZE	CLAMPING RANGE	HEIGHT	SHEET	CONNECTION LENGTH	SLOT HOLE	SCREW	BREAKING LOAD	RECOMMENDED LOAD	QUANTITY PER BOX	WEIGHT (AVERAGE)
		(mm)	(H) (mm)	(TxW) (mm)	(V) (mm)	(SxH) (mm)	(S) (metric)	(kN)	(kN)	(pc)	(kg)
PBK 050	50	48 - 53	45,5	1,2x20	36	9x18	M5	1,2	0,4	75	5,13
PBK 075	75	74 - 81	58,5	1,5x25	36	9x18	M6	1,2	0,4	50	7,51
PBK 100	100	100 - 108	74,5	1,5x25	36	9x18	M6	2	0,7	30	5,93
PBK 125	125	121 - 130	89,5	2x25	36	12,5x20	M6	2	0,7	25	6,86
PBK 150	150	150 - 159	103,5	2x25	36	12,5x20	M6	2	0,7	20	6,30
PBK 200	200	193 - 204	134,5	2x25	36	12,5x20	M6	2	0,7	10	4



Ventilation Pipe Clamps




M8 Standard Nut



Application / Uygulama

Used with Ventilation pipes.

Mounting Example

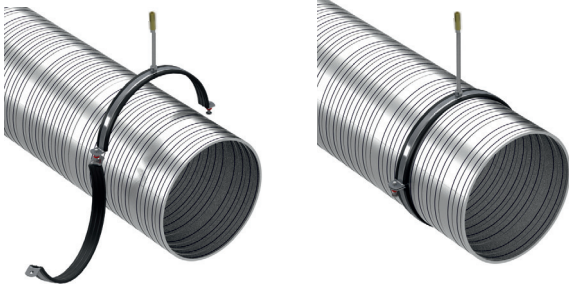

HS

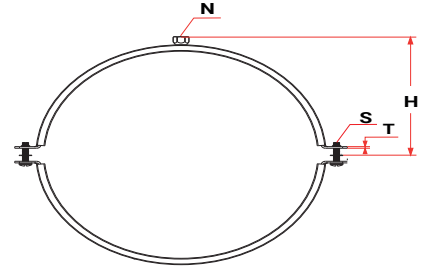

Material:

Steel

Standard Finish:

Zinc Plated

Hardness of Rubber Lining:

55 $\pm$ 5 Shore A

Isolation Rubber:

Standard TPE, on request EPDM

Temperature Resistance:


-50 $^{\circ}$ C / +110 $^{\circ}$ C

HS

CODE	SIZE	PIPE DIAMETER ($\varnothing$) (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	NUT (N) (metric)	SCREW (S) (metric)	QUANTITY (PER BOX) (pc)	WEIGHT (ORTALAMA KG / AVARAGE KG)
HS 0071	71	73,4	117	52	1,5x20	M8	M6	40	4,74
HS 0080	80	82,4	126	56,5	1,5x20	M8	M6	35	4,52
HS 0090	90	92,6	136	61,5	1,5x20	M8	M6	35	4,89
HS 0100	100	103,6	147	67	1,5x20	M8	M6	35	5,29
HS 0112	112	115,6	159	73	1,5x20	M8	M6	35	5,74
HS 0125	125	128,6	172	79,5	1,5x20	M8	M6	35	6,21
HS 0140	140	143,6	186	86,5	1,5x20	M8	M6	30	5,81
HS 0150	150	153,6	197	92	1,5x20	M8	M6	30	6,16
HS 0160	160	163,6	209	98	1,5x20	M8	M6	30	6,54
HS 0180	180	183,6	229	108	1,5x20	M8	M6	25	6,02
HS 0200	200	203,6	247	117	1,5x20	M8	M6	20	5,19
HS 0224	224	227,6	280	132	2x25	M8	M6	15	6,45
HS 0250	250	253,6	306	145	2x25	M8	M6	20	9,29
HS 0280	280	284,8	336	160	2x25	M8	M6	20	10,24
HS 0300	300	304,8	357	170,5	2x25	M8	M6	20	10,92
HS 0315	315	319,8	372	178	2x25	M8	M6	20	11,40
HS 0355	355	359,8	412	198	2x25	M8	M6	20	12,68
HS 0400	400	404,8	457	220,5	2x25	M8	M6	20	14,16
HS 0450	450	454,8	507	245,5	2x25	M8	M6	15	11,93
HS 0500	500	504,8	557	270,5	2x25	M8	M6	10	9,23
HS 0560	560	564,8	627	300	2,5x25	M8	M10	10	13,12
HS 0600	600	604,8	667	320	2,5x25	M8	M10	10	13,88
HS 0630	630	636	697	335	2,5x25	M8	M10	10	14,46

Pipe Clamps

Ventilation Pipe Clamp with Combi Nut





Application:
Used with Ventilation pipes.

Mounting Example



HKS

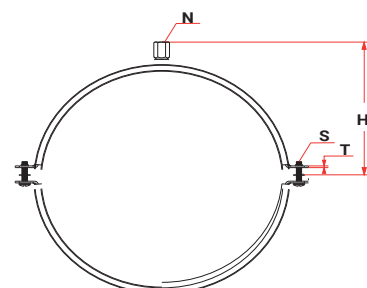

Material:
Steel
Standard Finish:
Zinc Plated
Hardness of Rubber Lining:
55 $\pm$ 5 Shore A
Isolation Rubber:
Standard TPE, on request EPDM
Temperature Resistance:
-50°C / +110°C

HKS

CODE	SIZE	PIPE DIAMETER ($\varnothing$) (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	NUT (N) (metric)	SCREW (S) (metric)	QUANTITY (PER BOX) (pc)	WEIGHT (AVERAGE KG)
HKS 0071	71	73,4	117	52	1,5x20	M8 / M10	M6	40	5,02
HKS 0080	80	82,4	126	56,5	1,5x20	M8 / M10	M6	35	4,77
HKS 0090	90	92,6	136	61,5	1,5x20	M8 / M10	M6	35	5,14
HKS 0100	100	103,6	147	67	1,5x20	M8 / M10	M6	35	5,54
HKS 0112	112	115,6	159	73	1,5x20	M8 / M10	M6	35	5,99
HKS 0125	125	128,6	172	79,5	1,5x20	M8 / M10	M6	35	6,46
HKS 0140	140	143,6	186	86,5	1,5x20	M8 / M10	M6	30	6,02
HKS 0150	150	153,6	197	92	1,5x20	M8 / M10	M6	30	6,37
HKS 0160	160	163,6	209	98	1,5x20	M8 / M10	M6	30	6,75
HKS 0180	180	183,6	229	108	1,5x20	M8 / M10	M6	25	6,20
HKS 0200	200	203,6	247	117	1,5x20	M8 / M10	M6	20	5,33
HKS 0224	224	227,6	280	132	2x25	M8 / M10	M6	15	6,55
HKS 0250	250	253,6	306	145	2x25	M8 / M10	M6	20	9,43
HKS 0280	280	284,8	336	160	2x25	M8 / M10	M6	20	10,38
HKS 0300	300	304,8	357	170,5	2x25	M8 / M10	M6	20	11,06
HKS 0315	315	319,8	372	178	2x25	M8 / M10	M6	20	11,54
HKS 0355	355	359,8	412	198	2x25	M8 / M10	M6	20	12,82
HKS 0400	400	404,8	457	220,5	2x25	M8 / M10	M6	20	14,30
HKS 0450	450	454,8	507	245,5	2x25	M8 / M10	M6	15	12,04
HKS 0500	500	504,8	557	270,5	2x25	M8 / M10	M6	10	9,30
HKS 0560	560	564,8	627	300	2,5x25	M8 / M10	M10	10	13,19
HKS 0600	600	604,8	667	320	2,5x25	M8 / M10	M10	10	13,95
HKS 0630	630	636	697	335	2,5x25	M8 / M10	M10	10	14,53

Ventilation Pipe Clamp without Nut





Application:

Used with Ventilation pipes

Mounting Example



HC

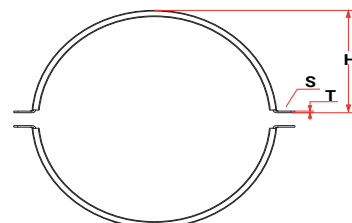

Material:

Steel

Standard Finish:

Zinc Plated

Hardness of Rubber Lining:

55 $\pm$ 5 Shore A

Isolation Rubber:

Standard TPE, on request EPDM

Temperature Resistance:

-50°C / +110°C

HC

CODE	SIZE	PIPE DIAMETER ($\varnothing$) (mm)	LENGTH (L) (mm)	HEIGHT (H) (mm)	SHEET (TxW) (mm)	HOLE SIZE (mm)	ROD (metric)	QUANTITY (PER BOX) (pc)	WEIGHT (AVERAGE KG)
HC 0071	71	73,4	117	37	1,5x20	7x8	M6	40	3,96
HC 0080	80	82,4	126	42	1,5x20	7x8	M6	35	3,85
HC 0090	90	92,6	136	47	1,5x20	7x8	M6	35	4,20
HC 0100	100	103,6	147	52	1,5x20	7x8	M6	35	4,62
HC 0112	112	115,6	159	58	1,5x20	7x8	M6	35	5,04
HC 0125	125	128,6	172	65	1,5x20	7x8	M6	35	5,53
HC 0140	140	143,6	186	72	1,5x20	7x8	M6	30	5,22
HC 0150	150	153,6	197	77	1,5x20	7x8	M6	30	5,58
HC 0160	160	163,6	209	82	1,5x20	7x8	M6	30	5,94
HC 0180	180	183,6	229	92	1,5x20	7x8	M6	25	5,53
HC 0200	200	203,6	247	102	1,5x20	7x8	M6	20	4,80
HC 0224	224	227,6	280	114	2x25	7x8	M6	15	6,15
HC 0250	250	253,6	306	127	2x25	7x8	M6	20	8,90
HC 0280	280	284,8	336	143	2x25	7x8	M6	20	9,84
HC 0300	300	304,8	357	153	2x25	7x8	M6	20	10,52
HC 0315	315	319,8	372	160	2x25	7x8	M6	20	11,02
HC 0355	355	359,8	412	180	2x25	7x8	M6	20	12,28
HC 0400	400	404,8	457	205	2x25	7x8	M6	20	13,76
HC 0450	450	454,8	507	230	2x25	7x8	M6	15	11,64
HC 0500	500	504,8	557	255	2x25	7x8	M6	10	9,04
HC 0560	560	564,8	627	285	2,5x25	11x13	M10	10	11,84
HC 0600	600	604,8	667	305	2,5x25	11x13	M10	10	12,60
HC 0630	630	636	697	320	2,5x25	11x13	M10	10	13,18
HC 0710	710	716	777	360	2,5x25	11x13	M10	10	14,92
HC 0800	800	806	867	405	2,5x25	11x13	M10	10	16,64
HC 0900	900	906	967	455	2,5x25	11x13	M10	8	15,08
HC 1000	1000	1007,2	1069	505	2,5x25	11x13	M10	8	17,22
HC 1120	1120	1127,2	1189	565	2,5x25	11x13	M10	4	9,52
HC 1250	1250	1257,2	1319	630	2,5x25	11x13	M10	4	11,26
HC 1400	1400	1407,2	1469	705	2,5x25	11x13	M10	4	12,41

Pipe Clamps

Polyurethane Insulation Support



Application:

Used for eliminating the heat losses inside of the pipes within hot-cold pipe installations

PIT

CODE	SIZE	PIPE SIZE (ØD)(mm)	THICKNESS (mm)	LENGTH (L)	OUTER SIZE OF SUPPORT (ØD)(mm)	SUITABLE PIPE CLAMP SIZE
PIT 015	1/2"	21,3	20	50	61,3	2"
PIT 020	3/4"	26,9	20	50	66,9	67-75
PIT 025	1"	33,7	20	50	73,7	67-75
PIT 032	1 1/4"	42,4	20	50	82,4	83-91
PIT 040	1 1/2"	48,3	20	50	88,3	3"
PIT 050	2"	60,3	20	50	100,3	95-104
PIT 065	2 1/2"	76,1	30	50	136,1	5"
PIT 080	3"	88,9	30	50	148,9	5"
PIT 100	4"	114,3	30	50	174,3	6"
PIT 125	5"	139,7	30	50	199,7	196-209
PIT 150	6"	168,3	30	50	228,3	8"
PIT 200	8"	219,1	30	50	279,1	10"
PIT 250	10"	273	30	50	333,0	12"
PIT 300	12"	324	30	50	384,0	380-390
PIT 350	14"	355,6	30	50	415,6	16"
PIT 400	16"	406,4	30	50	466,4	18"



PIT

CODE	SIZE	PIPE SIZE (ØD)(mm)	THICKNESS (mm)	LENGTH (L)	OUTER SIZE OF SUPPORT (ØD)(mm)	SUITABLE PIPE CLAMP SIZE
PIT 015 60	1/2"	21,3	20	60	61,3	2"
PIT 020 60	3/4"	26,9	20	60	66,9	67-75
PIT 025 60	1"	33,7	20	60	73,7	67-75
PIT 032 60	1 1/4"	42,4	20	60	82,4	83-91
PIT 040 60	1 1/2"	48,3	20	60	88,3	3"
PIT 050 60	2"	60,3	20	60	100,3	95-104
PIT 065 60	2 1/2"	76,1	30	60	136,1	5"
PIT 080 60	3"	88,9	30	60	148,9	5"
PIT 100 60	4"	114,3	30	60	174,3	6"
PIT 125 60	5"	139,7	30	60	199,7	196-209
PIT 150 60	6"	168,3	30	60	228,3	8"
PIT 200 60	8"	219,1	30	60	279,1	10"
PIT 250 60	10"	273	30	60	333,0	12"
PIT 300 60	12"	324	30	60	384,0	380-390
PIT 350 60	14"	355,6	30	60	415,6	16"
PIT 400 60	16"	406,4	30	60	466,4	18"



PIT

CODE	SIZE	PIPE SIZE (ØD)(mm)	THICKNESS (mm)	LENGTH (L)	OUTER SIZE OF SUPPORT (ØD)(mm)	SUITABLE PIPE CLAMP SIZE
PIT 015 100	1/2"	21,3	20	100	61,3	2"
PIT 020 100	3/4"	26,9	20	100	66,9	67-75
PIT 025 100	1"	33,7	20	100	73,7	67-75
PIT 032 100	1 1/4"	42,4	20	100	82,4	83-91
PIT 040 100	1 1/2"	48,3	20	100	88,3	3"
PIT 050 100	2"	60,3	20	100	100,3	95-104
PIT 065 100	2 1/2"	76,1	30	100	136,1	5"
PIT 080 100	3"	88,9	30	100	148,9	5"
PIT 100 100	4"	114,3	30	100	174,3	6"
PIT 125 100	5"	139,7	30	100	199,7	196-209
PIT 150 100	6"	168,3	30	100	228,3	8"
PIT 200 100	8"	219,1	30	100	279,1	10"
PIT 250 100	10"	273	30	100	333,0	12"
PIT 300 100	12"	324	30	100	384,0	380-390
PIT 350 100	14"	355,6	30	100	415,6	16"
PIT 400 100	16"	406,4	30	100	466,4	18"

PIT



Mounting Example

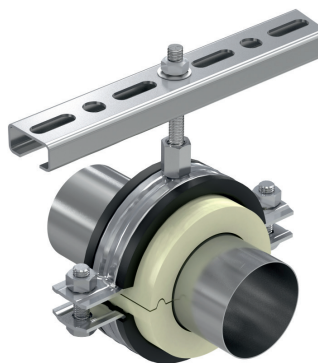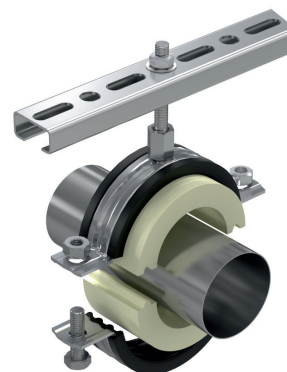

Material:
Polyurethane



ARGAS GROUP İÇ VE DIŞ TİCARET LTD. ŞTİ.

Yenişehir Mahallesi, Osmanlı Bulvarı No:11/A 28, Kurtköy, Pendik/İstanbul/Türkiye

www.argasgroup.com